
BÜCE Motorized backwash unit

Instruction Manual

BUCE 290 / BUCE 290S / BUCE 290W

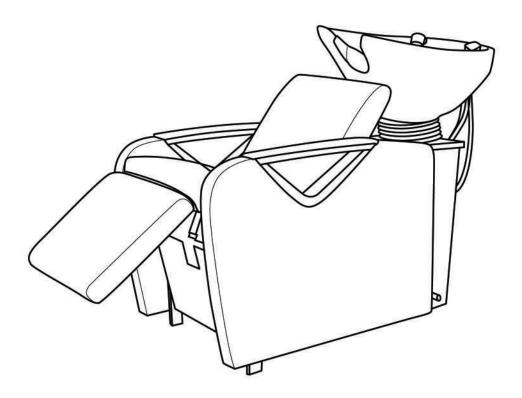

Model Name	BUCE 290, BUCE 290S, BUCE 290W	Rated Power Consumption	160W~250W	
Weight	Seat part 65Kg Ceramic basin 15Kg	Rated Voltage / Frequency	AC100~115V / 220~240V 50~60HZ	
Dimension	1270 * 630 * 960(H)	Load Rating	MAX 150Kg	

Thank you for purchasing BÜCE Backwash units.

For correct install and use, please read this instruction manual and warranty carefully before install and use.

Or it may cause the equipment to malfunction and shorten life time of the product.

Please contact your authorized dealer if you have any query on this the product in use.

Since installation work requires specialized skills, it must be installed at an installation specialist.

Problems arising from the installation work are the responsibility of the installer,

in which case no free service is provided.





Routine Check


- If you notice strange sounds, smells or smoke coming from the product, disconnect the power plug or turn off the main power switch immediately.
 It may cause electric shock or fire.
- Always remove moisture and chemicals after use, and clean the seat regularly with leather cleaner for longer last.
- Remove dirt and hairs from the filter net regularly to avoid flowing backwards from drainage hole caused by clogged.
- Dry the neck cushion regularly and it will help it last longer.
- Always secure the shower head back into the holder after using it.
 Water may fall on the floor along the shower hose.
- · Always keep the shampoo room area clean after using and it will help it last longer.

Safety Precautions

- Make sure the rated voltage is correct before use, failing to do so may cause failure or damage to parts.
- Do not subject the product to strong impacts or parts of the product may be damaged.
- Do not disassemble or modify the product on your own.
 In the event of product failure, contact your dealer or manufacturer.
- Keep clean the product when using it
 Failing to do so may cause a failure and shorten the life of the parts.
- Since the product is heavy, please be sure to have at least two people together when unpacking, lifting, or moving it.
 Products can be damaged and people may be injured due to excessive work.
- Do not let children near the product during the procedure.
 Failing to do so may lead to unexpected accidents.




Name of each part

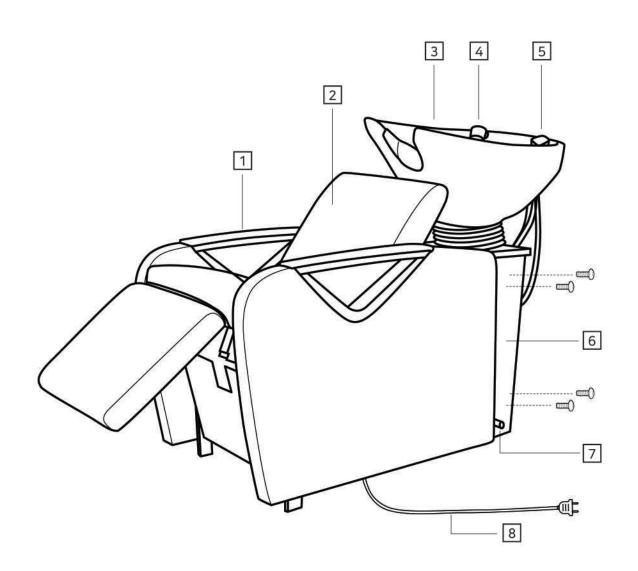

- 1 Armrest
- 6 Shampoo Bowl Stand
- 2 Seat Part
- 7 Up/Down Switch
- 3 Ceramic Basin
- 8 Power Plug
- 4 Showerhead
- 5 Faucet


⁹ Fastening
Bolts
Stopper




^{*} Bolts needed for assembly are fastened on the product or packed in the package.




Shampoo Bowl Assembly

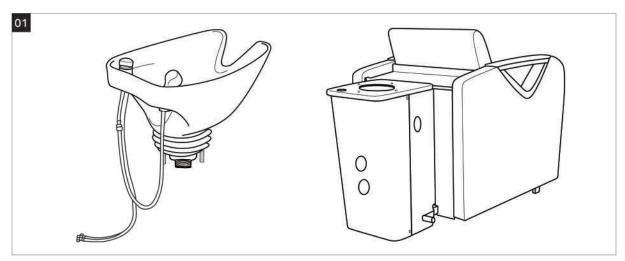


Prepare the packaged product.

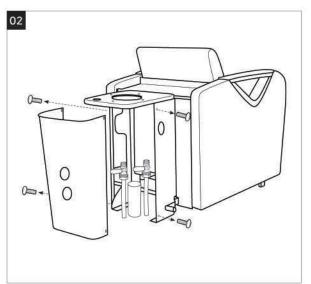


Unscrew and open the rear cover of the shampoo unit.

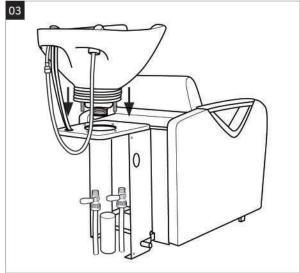

Position the ceramic basin on to the wash unit.

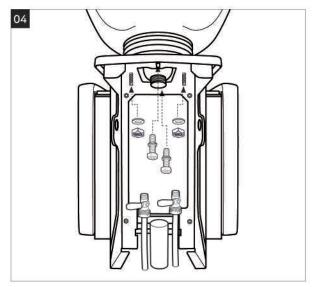


Assemble the ceramic basin to the wash unit.

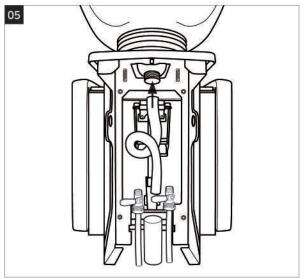


Connect the Drain Hose to the ceramic basin.



Shampoo Bowl Assembly

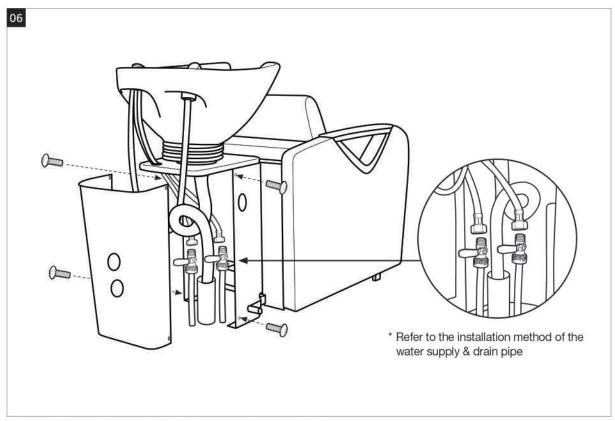


Connect the water supply & drainage and assemble the rear cover.

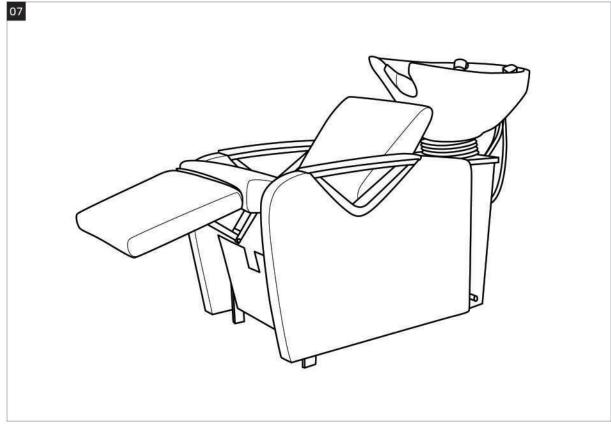


Completed



How to Install the Water Supply & Drain Pipe




- Installation requires specialized skills, so you need the help of an installer or Authorized Dealer.
- Check the location of the water supply & drain pipe before installation.
- An intermediate valve must be installed in the hot and cold water supply pipeline.
- Before connecting the water supply, use a hose to drain water through the drain pipe for more than 1 minute to remove debris such as sands.



- Make sure the cold water (blue color) and hot water (red color) correctly before connecting.
- To prevent odor from drainage hole, drain hose is required to be in a way of U-trap.
- The connection between the drainage hole and the drain pipe should be sealed to prevent odor.
- Connect the water supply & drain pipe and let the water run for more than 1 minute to see if water is leaking.
- Check if water pressure is effected when sink, toilet, etc. is being used.

Installation Method (Fixing to the Floor)

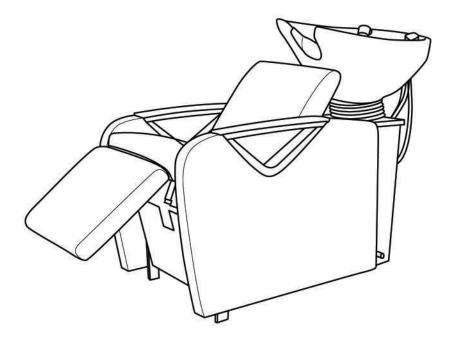

- Make sure that the floor of the installation i is suitable for fixing.
- It is recommended to use the product no sooner than 1 day after installation.



Installation Diagram 2900 Over 500-Wall or 1650 400~600 **Towel Cabinet** 640~840 Power supply (electric cable 500 m/m exposure) Drainage hole with a diameter of Hot and cold water (intermediate valve installation) 75mm recommended -200-

Product Warranty

Product Name	Motorized Backwash unit	Date of Purchase	
Model No.		Serial No.	
Place of purchase		Warranty	Refer to warranty period

Warranty

* One year from the date of purchase under the normal use.

Definition of consumable parts

- * Consumables are parts that are expected to wear, change in appearance, or be damaged as they are used. (Shower head, shower hose, faucet, neck cushion, head cushion, filter net, water stopper and so on)
- * Please note that consumables are not covered by the warranty.

 (The degree of wear and the time of breakage vary depending on the environment and conditions of use.)

Paid Service

When applying for service, the following cases will be charged even within the free service period.

- * In case the product is damaged or deformed due to impact caused by moving or falling after purchase.
- * In case of user's carelessness or unauthorized structure change
- * In case a failure occurs due to natural disasters (fire, water flood, earthquake)

Beauty Utility by Creative Expert

www.bdkorea.com



BD KOREA Co., Ltd.

20, Seounsandan-ro 8-gil, Gyeyang-gu, Incheon, Korea Tel: +82-32-676-2407 Fax: +82-32-675-8497 E-mail: bdkorea21@naver.com